

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant	:	F. Farassat)	Group Art Unit Unknown
)	
Appl. No.	:	Unknown)	
)	
Filed	:	Herewith)	
)	
For	:	METHOD OF TESTING)	
		BONDED CONNECTIONS,)	
		AND A WIRE BONDER)	
)	
Examiner	:	Unknown)	

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to examination, please amend the above referenced application as follows:

IN THE SPECIFICATION:

Page 1, line 8, immediately after the title, please insert:

Related Applications

This application claims the benefit of the European application 01 126 621.0 filed November 7, 2001.

Please amend the paragraph beginning on page 1, line 10, as follows:

Background of the InventionField of the Invention

The invention relates to a method of testing bonded connections and to a wire bonder equipped with a corresponding, integrated testing arrangement.

Description of the Related Art

Appl. No. : Unknown
Filed : Herewith

Please amend the paragraph beginning on page 3, line 22, as follows:

Summary of the Invention

It is the objective of the invention to disclose a method of testing bonded connections that is directly integrated into the manufacturing process, as well as a wire bonder suitable for implementing this method, which enables real-time quality control and the immediate execution of quality-ensuring adjustment procedures while the bonding process is still under way.

Please amend the paragraph beginning on page 3, line 29, as follows:

The objective is achieved with respect to a method of testing wire-bond connections between a bonding wire and a separate surface, in particular a bonding pad, which are produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool, wherein the wire-bond connections are produced under pressure, ultrasound, or heat. In one embodiment, the method comprises lifting the bonding head or the bonding tool a short distance away from the bonding site after the bonded connection has been created, fixedly gripping the bonding wire with the wire clamp, and raising the bonding head or the wire clamp with bonding wire gripped therein for a second distance during which process the tensile force acting on the bonding wire is detected.

In one aspect, raising the bonding head or the wire clamp for the second distance is calculated, in dependence on the structural features, so that a predetermined tensile force is exerted as a result of the raising, and an intact state of the bonded connection is detected during raising. In addition, the intactness of the bonded connection is determined by observing the time course of the tensile force acting on the wire clamp during the raising.

In one embodiment, a wire bonder in which there is integrated into a bonding head a testing arrangement for wire-bond connections between a bonding wire and a separate surface. Additionally, the bonding head comprises a tool or transducer holder to hold a bonding tool and a wire-clamp holder to hold a wire clamp for gripping a bonding wire, as well as a drive mechanism for the vertical displacement of the bonding head or tool holder and wire-clamp holder, and wherein a program control system to control a predetermined movement sequence of the bonding head or tool holder and wire-clamp holder is associated with the drive mechanism in

Appl. No. : Unknown
Filed : Herewith

order to carry out a measurement of tensile force at the bonding wire, and a force measuring device is associated with the wire-clamp holder in order to measure a tensile force acting on a bonded connection to the bonding wire that has been produced.

In one aspect, the wire-clamp holder is mounted on the bonding head so that it can be elastically deflected or linearly displaced against the action of a pretensioning element, and a force-measurement element or a strain gauge is associated with the holder. Additionally, the wire-clamp holder comprises a weakened preferential bending section or leaf-spring section, which ensures the elastic deflectability and in which the strain gauge is located. Furthermore, the program control system comprises a control program for automatically carrying out the method.

Please amend the paragraph beginning on page 4, line 1, follows:

The invention includes the idea of exposing a bonded connection to a tensile force immediately after it has been created, and of detecting its response. It further includes the idea that for this purpose the bonding tool and a wire clamp to grip the bonding wire should be moved in a suitable sequence of steps, in combination with a step in which the tensile force is measured, and the idea of disclosing a corresponding arrangement of a tool holder and a wire-clamp holder in combination with a control and evaluation means adapted thereto. One characteristic of the execution of the procedure is that the bonding wire is firmly gripped and pulled as soon as the bonded connection has been created (but after the contact between the bonded connection and the bonding tool has been broken), during simultaneous measurement of the tensile force.

Please amend the paragraph beginning on page 4, line 30, as follows:

A testing arrangement suitable for implementing the proposed solution comprises the wire-clamp holder provided with an associated force-measuring element and a control device to control the movement pattern sketched out above, and represents an integrated component of an improved wire bonder.

Please amend the paragraph beginning on Page 5, line 18, as follows:

Brief Description of the Drawings

Figure 1 illustrates a schematic drawing of one embodiment of a testing arrangement.

Appl. No. : **Unknown**
Filed : **Herewith**

Detailed Description of the Preferred Embodiment

Other advantages and useful features of the invention will be apparent from the subordinate claims and from the following description of a preferred exemplary embodiment with reference to Figure 1. This shows, in a schematic drawing, a testing arrangement 1 with components of the bonding head 3 of an ultrasonic wire bonder constructed in accordance with the invention. The elementary diagram refers to a bonding head of the kind described in the patent EP 0 857 535 A1, the structural details of which are not shown here. In the nature of a synoptic representation, function blocks are added with evaluation and control functions and symbols for the procedural steps.

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

IN THE CLAIMS:

Please amend the Claims as follows:

WHAT IS CLAIMED IS:

1. (Amended) A method of testing wire-bond connections between a bonding wire and a separate surface, the connections being produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool under pressure and the action of at least one of ultrasound and heat, the method comprising:

lifting the bonding head or the bonding tool a first distance away from the bonding site after the bonded connection has been created;

fixedly gripping the bonding wire with the wire clamp; and

raising the bonding head or the wire clamp with bonding wire gripped therein for a second distance during which process the tensile force acting on the bonding wire is detected.

2. (Amended) The method of Claim 1, wherein raising the bonding head or the wire clamp for the second distance is calculated, in dependence on the structural features, so that a predetermined tensile force is exerted as a result of the raising, and an intact state of the bonded connection is detected during raising.

3. (Amended) The method of Claim 2, wherein the intactness of the bonded connection is determined by observing the time course of the tensile force acting on the wire clamp during the raising.

4. (Amended) A wire bonder in which there is integrated into a bonding head a testing arrangement for wire-bond connections between a bonding wire and a separate surface.

5. (Amended) The wire bonder of Claim 4, wherein the bonding head comprises a tool holder or transducer holder to hold a bonding tool and a wire-clamp holder to hold a wire clamp for gripping the bonding wire, as well as a drive mechanism for vertical displacement of the bonding head or tool holder and wire-clamp holder, and wherein a program control system to control a predetermined movement sequence of the bonding head or tool holder and the wire-

Appl. No. : **Unknown**
Filed : **Herewith**

clamp holder is associated with the drive mechanism in order to carry out a measurement of tensile force at the bonding wire, and wherein a force measuring device is associated with the wire-clamp holder in order to measure a tensile force acting on a bonded connection to the bonding wire that has been produced.

6. (Amended) The wire bonder of Claim 5, wherein the wire-clamp holder is mounted on the bonding head so that it can be elastically deflected against the action of a pretensioning element and a force-measurement element is associated with the holder.

7. (Amended) The wire bonder of Claim 6, wherein the wire-clamp holder comprises a weakened preferential bending section or leaf-spring section, which ensures the elastic deflectability and in which the force-measurement element is located.

8. (Amended) The wire bonder of Claim 5, wherein the program control system induces the bonding head to lift a first distance and induces the wire clamp to grip the bonding wire and then induces the bonding head or the wire clamp to raise a second distance while the force measuring device measures the tensile force acting on the bonding wire.

Please, add the following new Claims:

9. (New) The wire bonder of Claim 4, wherein the separate surface is a bonding pad.

10. (New) The wire bonder of Claim 5, wherein the wire-clamp holder is mounted on the bonding head so that it can be linearly displaced.

11. (New) The wire bonder of Claim 6, wherein the force-measurement element comprises a strain gauge.

12. (New) A method of testing wire-bonded connections between a bonding wire and a separate surface having a bonding site, the method comprising:

lifting a bonding tool a first distance away from the bonding site after the bonded connection has been created;

Appl. No. : **Unknown**
Filed : **Herewith**

fixedly gripping the bonding wire with a wire clamp; and
raising the bonding tool for a second distance during which process the tensile force acting on the bonding wire is detected.

13. (New) The method of Claim 12, wherein the method further comprises producing the wire connections with a bonding head, a bonding tool, and a wire clamp associated with the bonding tool.

14. (New) The method of Claim 13, wherein producing the wire-bond connections includes producing the wire connections under pressure, ultrasound, or heat.

15. (New) The method of Claim 12, wherein lifting a bonding tool comprises lifting a bonding head.

16. (New) The method of Claim 12, wherein raising the bonding tool comprises raising the wire clamp with bonding wire gripped therein.

17. (New) The method of Claim 12, wherein lifting the bonding tool a first distance includes lifting the bonding tool a short distance.

18. (New) The method of Claim 12, wherein raising the bonding head or the wire clamp for the second distance is calculated in a manner so as to be dependent on the structural features so that a predetermined tensile force is exerted as a result of the raising.

19. (New) The method of Claim 18, wherein an intact state of the bonded connection is detected during raising.

20. (New) The method of Claim 19, wherein the intactness of the bonded connection is determined by observing the time course of the tensile force acting on the wire clamp during the raising.

21. (New) A wire bonder device comprising a bonding head with an integrated testing arrangement for wire-bond connections between a bonding wire and a surface.

Appl. No. : **Unknown**
Filed : **Herewith**

22. (New) The device of Claim 21, wherein the bonding head comprises a holding tool to hold a bonding tool and a wire-clamp holder to hold a wire clamp for gripping a bonding wire.

23. (New) The device of Claim 22, wherein the holding tool comprises a transducer holder.

24. (New) The device of Claim 22, wherein the bonding head further comprises a drive mechanism for the vertical displacement of the bonding head and wire-clamp holder.

25. (New) The device of Claim 24, wherein the bonding head further comprises a program control system to control a predetermined movement sequence of the bonding head and wire-clamp holder.

26. (New) The device of Claim 25, wherein the program control system is associated with the drive mechanism and carries out a measurement of tensile force at the bonding wire, and a force measuring device is associated with the wire-clamp holder in order to measure a tensile force acting on a bonded connection to the bonding wire that has been produced.

27. (New) The device of Claim 26, wherein the wire-clamp holder is mounted on the bonding head so that it can be elastically deflected against the action of a pre-tensioning element, and a force-measurement element or a strain gauge is associated with the holder.

28. (New) The device of Claim 27, wherein the wire-clamp holder comprises a weakened preferential bending section or leaf-spring section, which ensures the elastic deflectability and in which the strain gauge is located.

29. (New) The device of Claim 21, wherein the surface includes a separate surface.

30. (New) The device of Claim 29, wherein the separate surface includes a bonding pad.

Appl. No. : Unknown
Filed : Herewith

IN THE ABSTRACT:

Please amend the abstract as follows:

Abstract of the Disclosure

A method of testing wire-bond connections between a bonding wire and a substrate surface. The wire-bond connections are produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool under pressure and the action of ultrasound and/or heat. After the bonded connection has been created, the bonding head or the bonding tool is raised a short distance away from the bonding site, the bonding wire is firmly gripped by the wire clamp and the bonding head. The wire clamp with bonding wire gripped therein is raised for a second distance, during which process the tensile force acting on the bonding wire is detected.

201003-030102

Appl. No. : Unknown
Filed : Herewith

REMARKS

These changes are being made to bring the subject application into better conformance with U.S. practice, to claim the benefit of a previously filed European application, and to more distinctly claim what the Applicants regard as the invention. No new matter is being introduced. Entrance of this amendment is respectfully requested.

Attached hereto is a marked-up version of the changes made to the application by the current amendment. The attached page is captioned "**Version with Markings to Show Changes Made**"; additions are shown as underlined and deletions are shown [bracketed].

Please charge any additional fees, including any fees for additional extension of time, or credit overpayment to Deposit Account No. 11-1410.

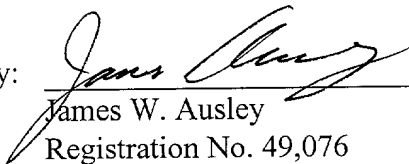
Respectfully submitted,

KNOBBE, MARTENS, OLSON & BEAR, LLP

Dated: _____

2/27/02

By: _____


James W. Ausley
Registration No. 49,076
Agent of Record
620 Newport Center Drive
Sixteenth Floor
Newport Beach, CA 92660
(909) 781-9231

Appl. No. : Unknown
Filed : Herewith

Version with Markings to Show Changes Made

IN THE SPECIFICATION:

Page 1, line 8, immediately after the title, please insert:

Related Applications

This application claims the benefit of the European application 01 126 621.0 filed November 7, 2001.

Please amend the paragraph beginning on page 1, line 10, as follows:

[DESCRIPTION]

Background of the Invention

Field of the Invention

The invention relates to a method of testing bonded connections and to a wire bonder equipped with a corresponding, integrated testing arrangement.

Description of the Related Art

Please amend the paragraph beginning on page 3, line 22, as follows:

Summary of the Invention

It is the objective of the invention to disclose a method of testing bonded connections that is directly integrated into the manufacturing process, as well as a wire bonder suitable for implementing this method, which enables real-time quality control and the immediate execution of quality-ensuring adjustment procedures while the bonding process is still under way.

Please amend the paragraph beginning on page 3, line 29, as follows:

[This objective is achieved with respect to the method by a testing procedure with the characteristics given in Claim 1, and with respect to the apparatus by a wire bonder with the characteristics given in Claim 4.]

Appl. No. : Unknown
Filed : Herewith

The objective is achieved with respect to a method of testing wire-bond connections between a bonding wire and a separate surface, in particular a bonding pad, which are produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool, wherein the wire-bond connections are produced under pressure, ultrasound, or heat. In one embodiment, the method comprises lifting the bonding head or the bonding tool a short distance away from the bonding site after the bonded connection has been created, fixedly gripping the bonding wire with the wire clamp, and raising the bonding head or the wire clamp with bonding wire gripped therein for a second distance during which process the tensile force acting on the bonding wire is detected.

In one aspect, raising the bonding head or the wire clamp for the second distance is calculated, in dependence on the structural features, so that a predetermined tensile force is exerted as a result of the raising, and an intact state of the bonded connection is detected during raising. In addition, the intactness of the bonded connection is determined by observing the time course of the tensile force acting on the wire clamp during the raising.

In one embodiment, a wire bonder in which there is integrated into a bonding head a testing arrangement for wire-bond connections between a bonding wire and a separate surface. Additionally, the bonding head comprises a tool or transducer holder to hold a bonding tool and a wire-clamp holder to hold a wire clamp for gripping a bonding wire, as well as a drive mechanism for the vertical displacement of the bonding head or tool holder and wire-clamp holder, and wherein a program control system to control a predetermined movement sequence of the bonding head or tool holder and wire-clamp holder is associated with the drive mechanism in order to carry out a measurement of tensile force at the bonding wire, and a force measuring device is associated with the wire-clamp holder in order to measure a tensile force acting on a bonded connection to the bonding wire that has been produced.

In one aspect, the wire-clamp holder is mounted on the bonding head so that it can be elastically deflected or linearly displaced against the action of a pretensioning element, and a force-measurement element or a strain gauge is associated with the holder. Additionally, the wire-clamp holder comprises a weakened preferential bending section or leaf-spring section, which ensures the elastic deflectability and in which the strain gauge is located. Furthermore, the program control system comprises a control program for automatically carrying out the method.

Appl. No. : Unknown
Filed : Herewith

Please amend the paragraph beginning on page 4, line 1, as follows:

The invention includes the [essential] idea of exposing a bonded connection to a tensile force immediately after it has been created, and of detecting its response. It further includes the idea that for this purpose the bonding tool and a wire clamp to grip the bonding wire should be moved in a suitable sequence of steps, in combination with a step in which the tensile force is measured, and the idea of disclosing a corresponding arrangement of a tool holder and a wire-clamp holder in combination with a control and evaluation means adapted thereto. [An essential] One characteristic of the execution of the procedure is that the bonding wire is firmly gripped and pulled as soon as the bonded connection has been created (but after the contact between the bonded connection and the bonding tool has been broken), during simultaneous measurement of the tensile force.

Please amend the paragraph beginning on page 4, line 30, as follows:

A testing arrangement suitable for implementing the proposed solution comprises[, as an essential element,] the wire-clamp holder [(which is known per se)] provided with an associated force-measuring element and a control device to control the movement pattern sketched out above, and represents an integrated component of an improved wire bonder.

The paragraph beginning on Page 5, line 18, has been amended as follows:

Brief Description of the Drawings

Figure 1 illustrates a schematic drawing of one embodiment of a testing arrangement.

Detailed Description of the Preferred Embodiment

Other advantages and useful features of the invention will be apparent from the subordinate claims and from the following description of a preferred exemplary embodiment with reference to [the figure] Figure 1. This shows, in a schematic drawing, a testing

Appl. No. : **Unknown**
Filed : **Herewith**

arrangement 1 with [essential] components of the bonding head 3 of an ultrasonic wire bonder constructed in accordance with the invention. The elementary diagram refers to a bonding head of the kind described in the patent EP 0 857 535 A1, the structural details of which are not shown here. In the nature of a synoptic representation, function blocks are added with evaluation and control functions and symbols for the [essential] procedural steps.

Appl. No. : Unknown
Filed : Herewith

IN THE CLAIMS:

Please amend the Claims as follows:

WHAT IS CLAIMED IS:

1. (Amended) [Method] A method of testing wire-bond connections between a bonding wire and a separate surface, [which are] the connections being produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool[,] under pressure and the action of at least one of ultrasound[,] and[/or] heat, the method comprising:

[characterized in that after the bonded connection has been created,] lifting the bonding head or the bonding tool [is lifted] a [short] first distance away from the bonding site, after the bonded connection has been created;

[the bonding wire is] fixedly gripping [gripped by] the bonding wire with the wire clamp; [,] and

raising the bonding head or the wire clamp with bonding wire gripped therein for a second distance[,], during which process the tensile force acting on the bonding wire is detected.

2. (Amended) The [Testing] method [according to] of Claim 1, wherein [characterized in that] raising the bonding head or the wire clamp [is raised] for the [a] second distance is calculated, in dependence on the structural features, so that a predetermined tensile force is exerted as a result of the raising, and an intact state of the bonded connection is detected during raising.

3. (Amended) The [Testing] method of [according to] Claim 2, wherein [characterized in that] the intactness of the bonded connection is determined by observing the time course of the tensile force acting on the wire clamp during the raising.

4. (Amended) A wire [Wire] bonder in which there is integrated into a bonding head a testing arrangement for wire-bond connections between a bonding wire and a separate surface[,in particular a bonding pad].

Appl. No. : Unknown
Filed : Herewith

5. (Amended) The wire [Wire] bonder of [according to] Claim 4, wherein the [with a] bonding head [that] comprises a tool holder or transducer holder to hold a bonding tool and a wire-clamp holder to hold a wire clamp for gripping [a] the bonding wire, as well as a drive mechanism for [the] vertical displacement of the bonding head or tool holder and wire-clamp holder, and wherein [characterized in that] a program control system to control a predetermined movement sequence of the bonding head or tool holder and the wire-clamp holder is associated with the drive mechanism in order to carry out a measurement of tensile force at the bonding wire, and wherein a force measuring device is associated with the wire-clamp holder in order to measure a tensile force acting on a bonded connection to the bonding wire that has been produced.

6. (Amended) The wire [Wire] bonder of [according to] Claim 5, wherein [characterized in that] the wire-clamp holder is mounted on the bonding head so that it can be elastically deflected [or linearly displaced] against the action of a pretensioning element, and a force-measurement element[, in particular a strain gauge,] is associated with the holder.

7. (Amended) The wire [Wire] bonder of [according to] Claim 6, wherein [characterized in that] the wire-clamp holder comprises a weakened preferential bending section or leaf-spring section, which ensures the elastic deflectability and in which the [strain gauge] force measurement element is located.

8. (Amended) The wire [Wire] bonder of [according to] Claim 5, wherein [characterized in that within] the program control system induces the bonding head to lift a first distance and induces the wire clamp to grip the bonding wire and then induces the bonding head or the wire clamp to raise a second distance while the force measuring device measures the tensile force acting on the bonding wire [a control program for automatically carrying out the method according to one of the claims 1 to 3 is implemented].

Appl. No. : Unknown
Filed : Herewith

IN THE ABSTRACT:

Please amend the abstract as follows:

Abstract of the Disclosure

A method [Method] of testing wire-bond connections between a bonding wire and a substrate surface[, which]. The wire-bond connections are produced by a bonding head with a bonding tool and a wire clamp associated with the bonding tool[,] under pressure and the action of ultrasound and/or heat[,wherein after]. After the bonded connection has been created, the bonding head or the bonding tool is raised a short distance away from the bonding site, the bonding wire is firmly gripped by the wire clamp[,] and the bonding head [or the]. The wire clamp with bonding wire gripped therein is raised for a second distance, during which process the tensile force acting on the bonding wire is detected.

[(Figure)]

\\DOCS_RS\FILES\DOCS\yqh\JQH-1086 doc